

Hyperformance® TOUGH Replacement Kolpin® Windshield Part# 28110 (GLASS ONLY)



Product Replacement Instructions | Part
No: 28110

Application: Kolpin® Glass Windshield Replacement (Glass ONLY) for the Polaris Ranger XP 900/1000 UTV

Before You Begin: Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

Note: If any component is missing, Call us and we can help, 877-539-5523


Note: Two people are required to install this Windshield Kit.

This Kit includes:

Item	Qty	Part Description
1	1	Hyperformance® Tough Glass Windshield
2	1	Interior Windshield Gasket Seal
3	1	Gasket Installation Stick
4	1	Instruction Guide (not pictured)

This Kit Does NOT Include:

- Kolpin® Part No: 28110 Windshield Frame
- Any additional Kolpin® Part No: 28110 Windshield Installation Hardware



Additional Tools Required:

- Torx Bit Set
- Torque Wrench
- Metal Shears/
Box Cutter



Hyperformance Glass Products LLC. | 11969 Shelby Tech Dr. | Shelby Township, MI 48315
(877) 539-5523 | hyperformanceglassproducts.com | sales@hyperformanceglassproducts.com

Assembly Time: Approximately 15 minutes

Important: Your Kolpin® Glass Windshield Kit is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.


Installation Instructions:

1. Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.
2. Uninstall the Kolpin® Glass Windshield Metal Frame assembly from the vehicle.
3. Place the Kolpin® Windshield Metal Frame assembly on a clean work surface exterior surface facing down. Be sure to remove the original glass window & gasket seal from the interior of the assembly.
4. Loosely fit your new interior windshield gasket around the perimeter of the windshield opening. Then carefully trim off any excess of the gasket seal so it fits properly. (See Image 1)
5. After the gasket seal has been properly trimmed, begin to attach the gasket seal by sliding the thinnest portion of the gasket seal to the inner perimeter of the Windshield opening, with the thicker portion of the gasket facing the exterior of the windshield. (See Image 2 - 4)

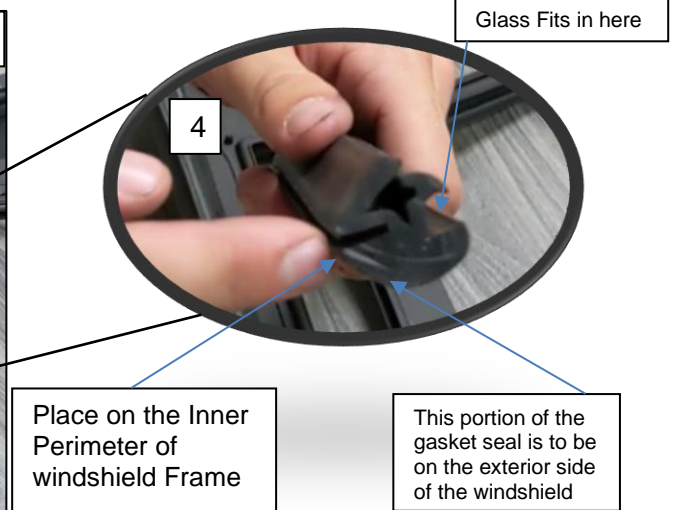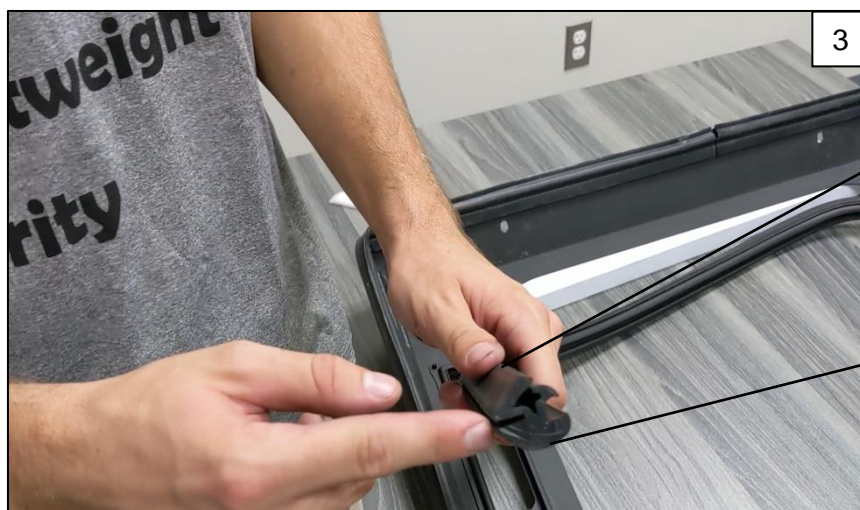

Installation Instructions (Continued):

6. After the gasket seal is properly fit onto the Windshield frame, align the Hyperformance® TOUGH glass on top of the frame. The HGP Logo must be on the driver's side while the HTOUGH shield log will be on the passenger side (See Image # 5)
7. Now that the glass is properly aligned, use the installation stick to open the gasket so you can begin to slide the glass into the gasket seal. Repeat the process until the glass is completely inserted on all sides of the gasket seal
8. Once the glass is installed onto the gasket seal, the last step is to lock the gasket seal. First use the installation stick to pry into the lip of the seal raising the upper lip (See image #6). Using your hands, push the lower lip under the upper lip, then drag the installation stick across the perimeter of the windshield until the gasket seal is properly locked in place. (See image #7)

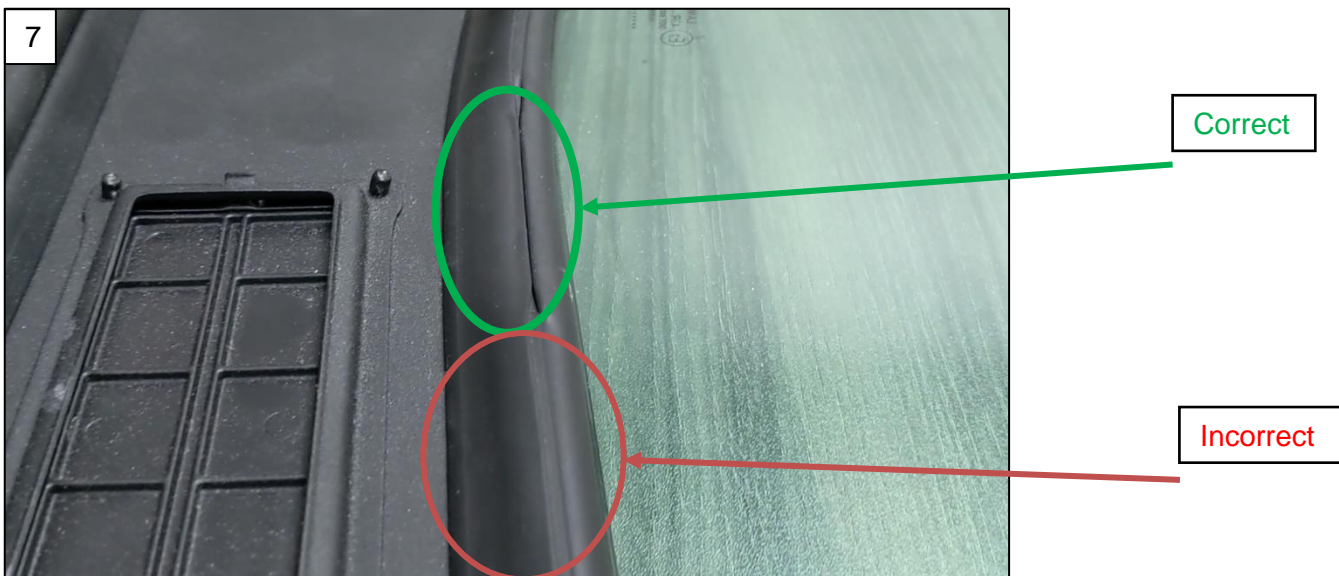

9. Now that the glass is properly installed, the last step is to re-install the windshield assembly with the Hyperformance® TOUGH Glass back on to the vehicle using the same assembly process that was used previously.



WARNING: If transporting vehicle in non-enclosed trailer then vehicle must FACE FORWARD, or windshield must be removed.

Failure to comply may allow airflow, vibration, or other factors to separate windshield from vehicle and cause an accident, resulting in serious personal injury or death.

Use and Care Information:

- Check the accessory mounts frequently and retighten hardware if necessary.
- Replace this accessory with a new one if it is damaged.
- Never use petroleum solvents such as gasoline, thinner, benzene, acid or alkaline cleaners.

For additional assistance, please contact HGP customer service department at (877) 539-5523 or email sales@hyperformanceglassproducts.com

Two Year Limited Warranty

Hyperformance® Glass Products are warranted against defects in workmanship or materials for two years and unlimited miles when purchased directly from HGP or one of our authorized distributors.

This warranty does not apply to parts that have been damaged by accident, alteration, abuse, improper maintenance, normal wear, or other causes beyond the manufacturer's control. In order to protect you and your ATV, certain parts of the accessory system and/or hardware are designed to fail when the equipment is over-stressed. Parts that are lost due to loosening and improper maintenance are not covered under warranty. This warranty does not cover removal or reinstallation labor fees of the plow system and related components.